



GALVACOLOR®

www.crcind.com




2in1

PRIMER & ZINC TOPCOAT

CRC Galvacolor is an aerosol paint that protects the metal from corroding through zinc phosphate pigments and the formation of a physical barrier.

Advantages of CRC Galvacolor:


- Easy applicable - minimal preparation
- Long lasting corrosion protection - prolonged service life
- Fast drying system - less downtime
- Nice aesthetic - beautiful satin finish
- Free of toluene
- Free of lead and chromate
- Protection through barrier formation and active pigmentation
- 2 in 1 - Primer and zinc top coat in one pass
- 1 coat protection for medium corrosive environments
- Available in 9 colors

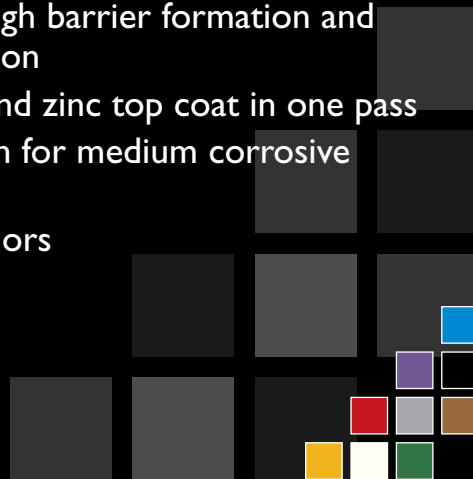

Physical properties:

- Film thickness per spray pass: $\pm 30 \mu\text{m}$.
- Dry to touch (@ room temperature, $30 \mu\text{m}$): $\pm 20 \text{ min}$.
- Recommended film thickness: $50 - 80 \mu\text{m}$.
- Dry to touch (@ room temperature, $50 - 80 \mu\text{m}$): $\pm 30 \text{ min}$.
- Fully cured (@ room temperature, $50 - 80 \mu\text{m}$): $\pm 6 \text{ h}$.
- Minimum application temperature: $\pm 10^\circ\text{C}$ (substrate temp.).
- Adhesion: GT = 0/I.
- Maximum operational temperature: 80°C .
- Gloss: satin gloss : (60% @ 60° Gardner).

- Salt Spray: Tested against ISO 12944-2/NPR 7452 category C3 moderate.
This test method corresponds in practice with the following environmental conditions:
 - Inside environment: production halls with high humidity and limited air contamination, food production areas, laundries, breweries, dairy companies.
 - Outside environment: City centers, industrial areas with limited SO_2 -contamination, coastal areas with a mild salinity.



www.crcind.com



GALVACOLOR®

YELLOW

RAL
1004

GASS AND LIQUIFIED GASS (except air, nitrogen and oxygen)



RED

RAL
3000

FIRE FIGHTING



VIOLET

RAL
4001

ACIDS AND ALKALIES



BLUE

RAL
5012


AIR



GREEN

RAL
6010

WATER



BROWN

RAL
8001

LIQUID FUELS & OILS (mineral, vegetable and animal oils)



BLACK

RAL
9005

NON-FLAMMABLE LIQUIDS



SILVER

RAL
9006

STEAM




WHITE

RAL
9010

GENERAL USE



The printed colors in this leaflet may slightly deviate from the real paint colors.

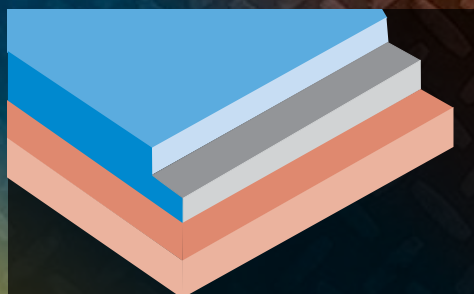

COLOR + ZINC BASE



BEFORE



AFTER



CRC Industries Europe

Touwslagerstraat 1 - B-9240 Zele, Belgium

Tel.: +32 (0)52-456011 - Fax: +32 (0)52-450034



www.crcind.com

Your distributor: